



CARACTERÍSTICAS / FEATURES


Material	hormigón Petra 1	Material	precast concrete Petra 1
Acabado	decapado e hidrofugado	Finish	etched and waterproofed
Dimensiones	Ø65, h. 41 cm	Dimensions	Ø65, h. 41 cm
Color	ver carta de colores	Colour	see colour catalogue
Fijación	apoyado por su propio peso o mediante resina epoxi	Fixing	resting on the ground or with epoxy resin
Peso	229 Kg	Weight	229 Kg
Palet	70 x 70 cm (1 unidad, no remontables) 135 x 70 cm (2 unidades, no remontables)	Pallet	70 x 70 cm (1 unit, no stackable) 135 x 70 cm (2 units, no stackable)




GEOMETRIA / GEOMETRY



PLANTA / TOP VIEW




VISTA INFERIOR / BOTTOM VIEW



ALZADO / FRONT VIEW

ESCALA / SCALE : 1/ 15


ESPECIFICACIONES / SPECIFICATIONS




Detalle M / Detail M		Tornillo avellanado M12 - Inox Countersunk screw M12 - Inox
		Casquillo M12 - Acero zincado alta precisión Threaded sleeve M12 - Galvanized steel high precision
Detalle N / Detail N		Casquillo M12 - Acero zincado alta precisión Threaded sleeve M12 - Galvanized steel high precision

MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION


- 1 Extraer tapón, enroscar cáncamo para elevación y enroscar varilla inferior
Extract topper, thread eyebolt and thread the lower rod

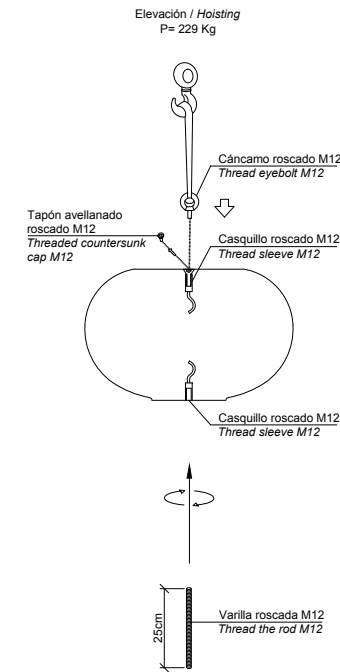

- 2 Perforar agujero de Ø2cm
Drill hole of Ø2 cm



- 3 Verter resina epoxy / Pour resin epoxy



- 4 Insertar la varilla en el agujero
Insert metal rod in hole

